



1040 N. Meridian Rd., P.O. Box 1556, Youngstown, Ohio 44501
 Phone: (330) 799-3333 Toll Free: 1-800-677-1799 FAX: (330) 797-3215

www.trumbull-mfg.com

ADJUSTABLE CHAINWHEELS


Ductile Iron
To Operate Overhead Valves From The Floor.

Ductile Iron Chainwheels allow operation of valves in high, hard-to reach locations by means of a slight pull on the sprocket chain. Universal design allows Chainwheel to be clamped to handwheel, or pinned directly to valve stem.

All Chainwheels are furnished with plated steel attachment hardware for clamping to handwheel. When Chainwheel is to be pinned to valve stem, a ductile iron bushing will be provided which can be machined to suit valve stem dimensions. Bushing and Chainwheel will be pre-drilled with pin hole, and supplied with a stainless steel pin for customer mounting to valve stem. Drilling of valve stem by customer. See reverse side for illustration of bushing.

SPECIFICATIONS:

Trumbull Item No. for Chainwheel	Size No.	Diameter of Chainwheel	Boxed Weight	O.D. Range of Handwheels Chainwheel Will Fit	Trumbull Item No. for Galv. Chain	Chain Weight per 100'	Length of Chain Required (2x Drop)
367-1873	TR-0.0	4"	3.0#	2" to 4"	172-1650	10.0#	Plus 1 ft.
367-1874	TR-1.0	6"	5.0#	4-1/4" to 5-3/4"	367-1894	17.5#	Plus 1 ft.
367-1875	TR-1.5	7-1/2"	9.2#	6" to 7-1/2"	367-1894	17.5#	Plus 1 ft.
367-1876	TR-2.0	9"	12.9#	7-3/4" to 9"	367-1894	17.5#	Plus 1-1/2 ft.
367-1877	TR-2.5	12-1/2"	15.7#	9-1/4" to 12-1/2"	367-1895	30.0#	Plus 1-1/2 ft.
367-1878	TR-3.0	15-1/2"	22.0#	12-3/4" to 15-1/2"	367-1895	30.0#	Plus 2 ft.
367-1879	TR-3.5	19"	31.5#	15-3/4" to 19"	367-1895	30.0#	Plus 2-1/2 ft.
367-1880	TR-4.0	22"	41.7#	19-1/4" to 22"	367-1896	35.0#	Plus 3 ft.
367-1881	TR-4.5	26"	48.6#	22-1/2" to 26"	367-1896	35.0#	Plus 3-1/2 ft.
367-1882	TR-5.0	30"	61.0#	22-1/2" to 36"	367-1896	35.0#	Plus 4 ft.

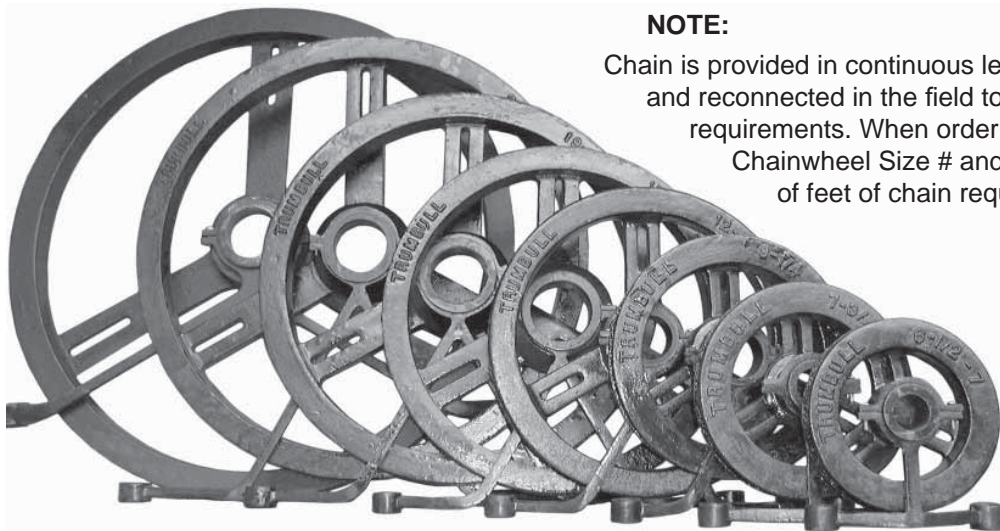

NOTE:

Chain is provided in continuous lengths. Easily cut and reconnected in the field to suit exact job requirements. When ordering, give the Chainwheel Size # and the number of feet of chain required.

NOTE: Also available in Type 316 Stainless Steel.